

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number  
**WO 2004/009486 A2**

(51) International Patent Classification<sup>7</sup>: B67D 1/00, 5/02,  
B65D 83/00, A23G 9/28, B41F 31/08

(21) International Application Number:  
PCT/GB2003/003079

(22) International Filing Date: 15 July 2003 (15.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0217235.1 24 July 2002 (24.07.2002) GB  
0306597.6 21 March 2003 (21.03.2003) GB

(71) Applicant (for all designated States except US): MCGILL  
TECHNOLOGY LIMITED [GB/GB]; McGill Technol-  
ogy Building, Endeavour Park, London Road, Addington,  
West Malling, Kent ME19 5TW (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): MCGILL, Shane,  
Robert [GB/GB]; McGill Technology Building, Endeav-  
our Park, London Road, Addington, West Malling, Kent  
ME19 5TW (GB). WHITE, Martin [GB/GB]; McGill  
Technology Building, Endeavour Park, London Road,  
Addington, West Malling, Kent ME19 5TW (GB).

(74) Agents: COWAN, David, Robert et al.; Withers &  
Rogers, Goldings House, 2 Hays Lane, London, SE1 2HW  
(GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: DRIVE MECHANISM

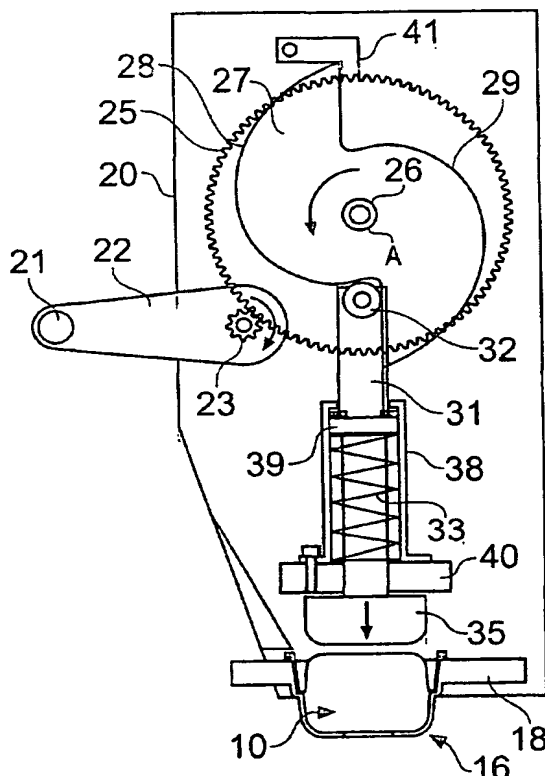

(57) **Abstract:** The invention is particularly concerned with providing a drive mechanism to extrude product from containers. In order to reduce the amount of effort which manual operation would entail there is provided a gear wheel 23 meshing with the driven gear through high ratio gearing, the driven gear 25 being associated with a cam 27 about which is located a cam follower 32. The cam follower carries a plunger arranged to move to engage the container 10 and discharge product therefrom.



WO 2004/009486 A2